


HEAVY AND EXTRA HEAVY STANDARDS

Trees				
Number of Plants	Species	Height	Girth	Specification
2 -	Acer platanoides 'Drummondii' - Norway Maple	3.5-6.0m	12-16cm	Heavy and extra heavy standards, container grown
6 -	Aesculus hippocastanum 'Baumannii' - Horse Chestnut	4.25-6.0m	14-16cm	Extra heavy standards, container grown
6 -	Betula utilis jacquemontii - West Himalayan Birch	3.5-6.0m	12-18cm	Heavy and extra heavy standards, container grown
11 -	Carpinus betulus - European Hornbeam	4.25-6.0m	14-16cm	Extra heavy standards, container grown
12 -	Corylus columna - Turkish Hazel	4.25-6.0m	14-16cm	Extra heavy standards, root balled
14 -	Tilia platyphyllos 'Rubra' - Red Twigged Lime	4.25-6.0m	14-16cm	Extra heavy standards, rootballed
9 -	Tilia tomentosa - Silver Lime	4.25-6.0m	14-16cm	Extra heavy standards, container grown
1 -	Quercus palustris - Spanish Oak	4.25-6.0m	14-16cm	Extra heavy standard, container grown
1 -	Quercus robur - English Oak	3.5-4.25m	12-14cm	Heavy standard, container grown
1 -	Cedrus atlantica - Atlas Cedar	2.0-2.5m		Container grown
1 -	Cedrus deodara - Himalayan Cedar	2.0-2.5m		Container grown
Total :64-				

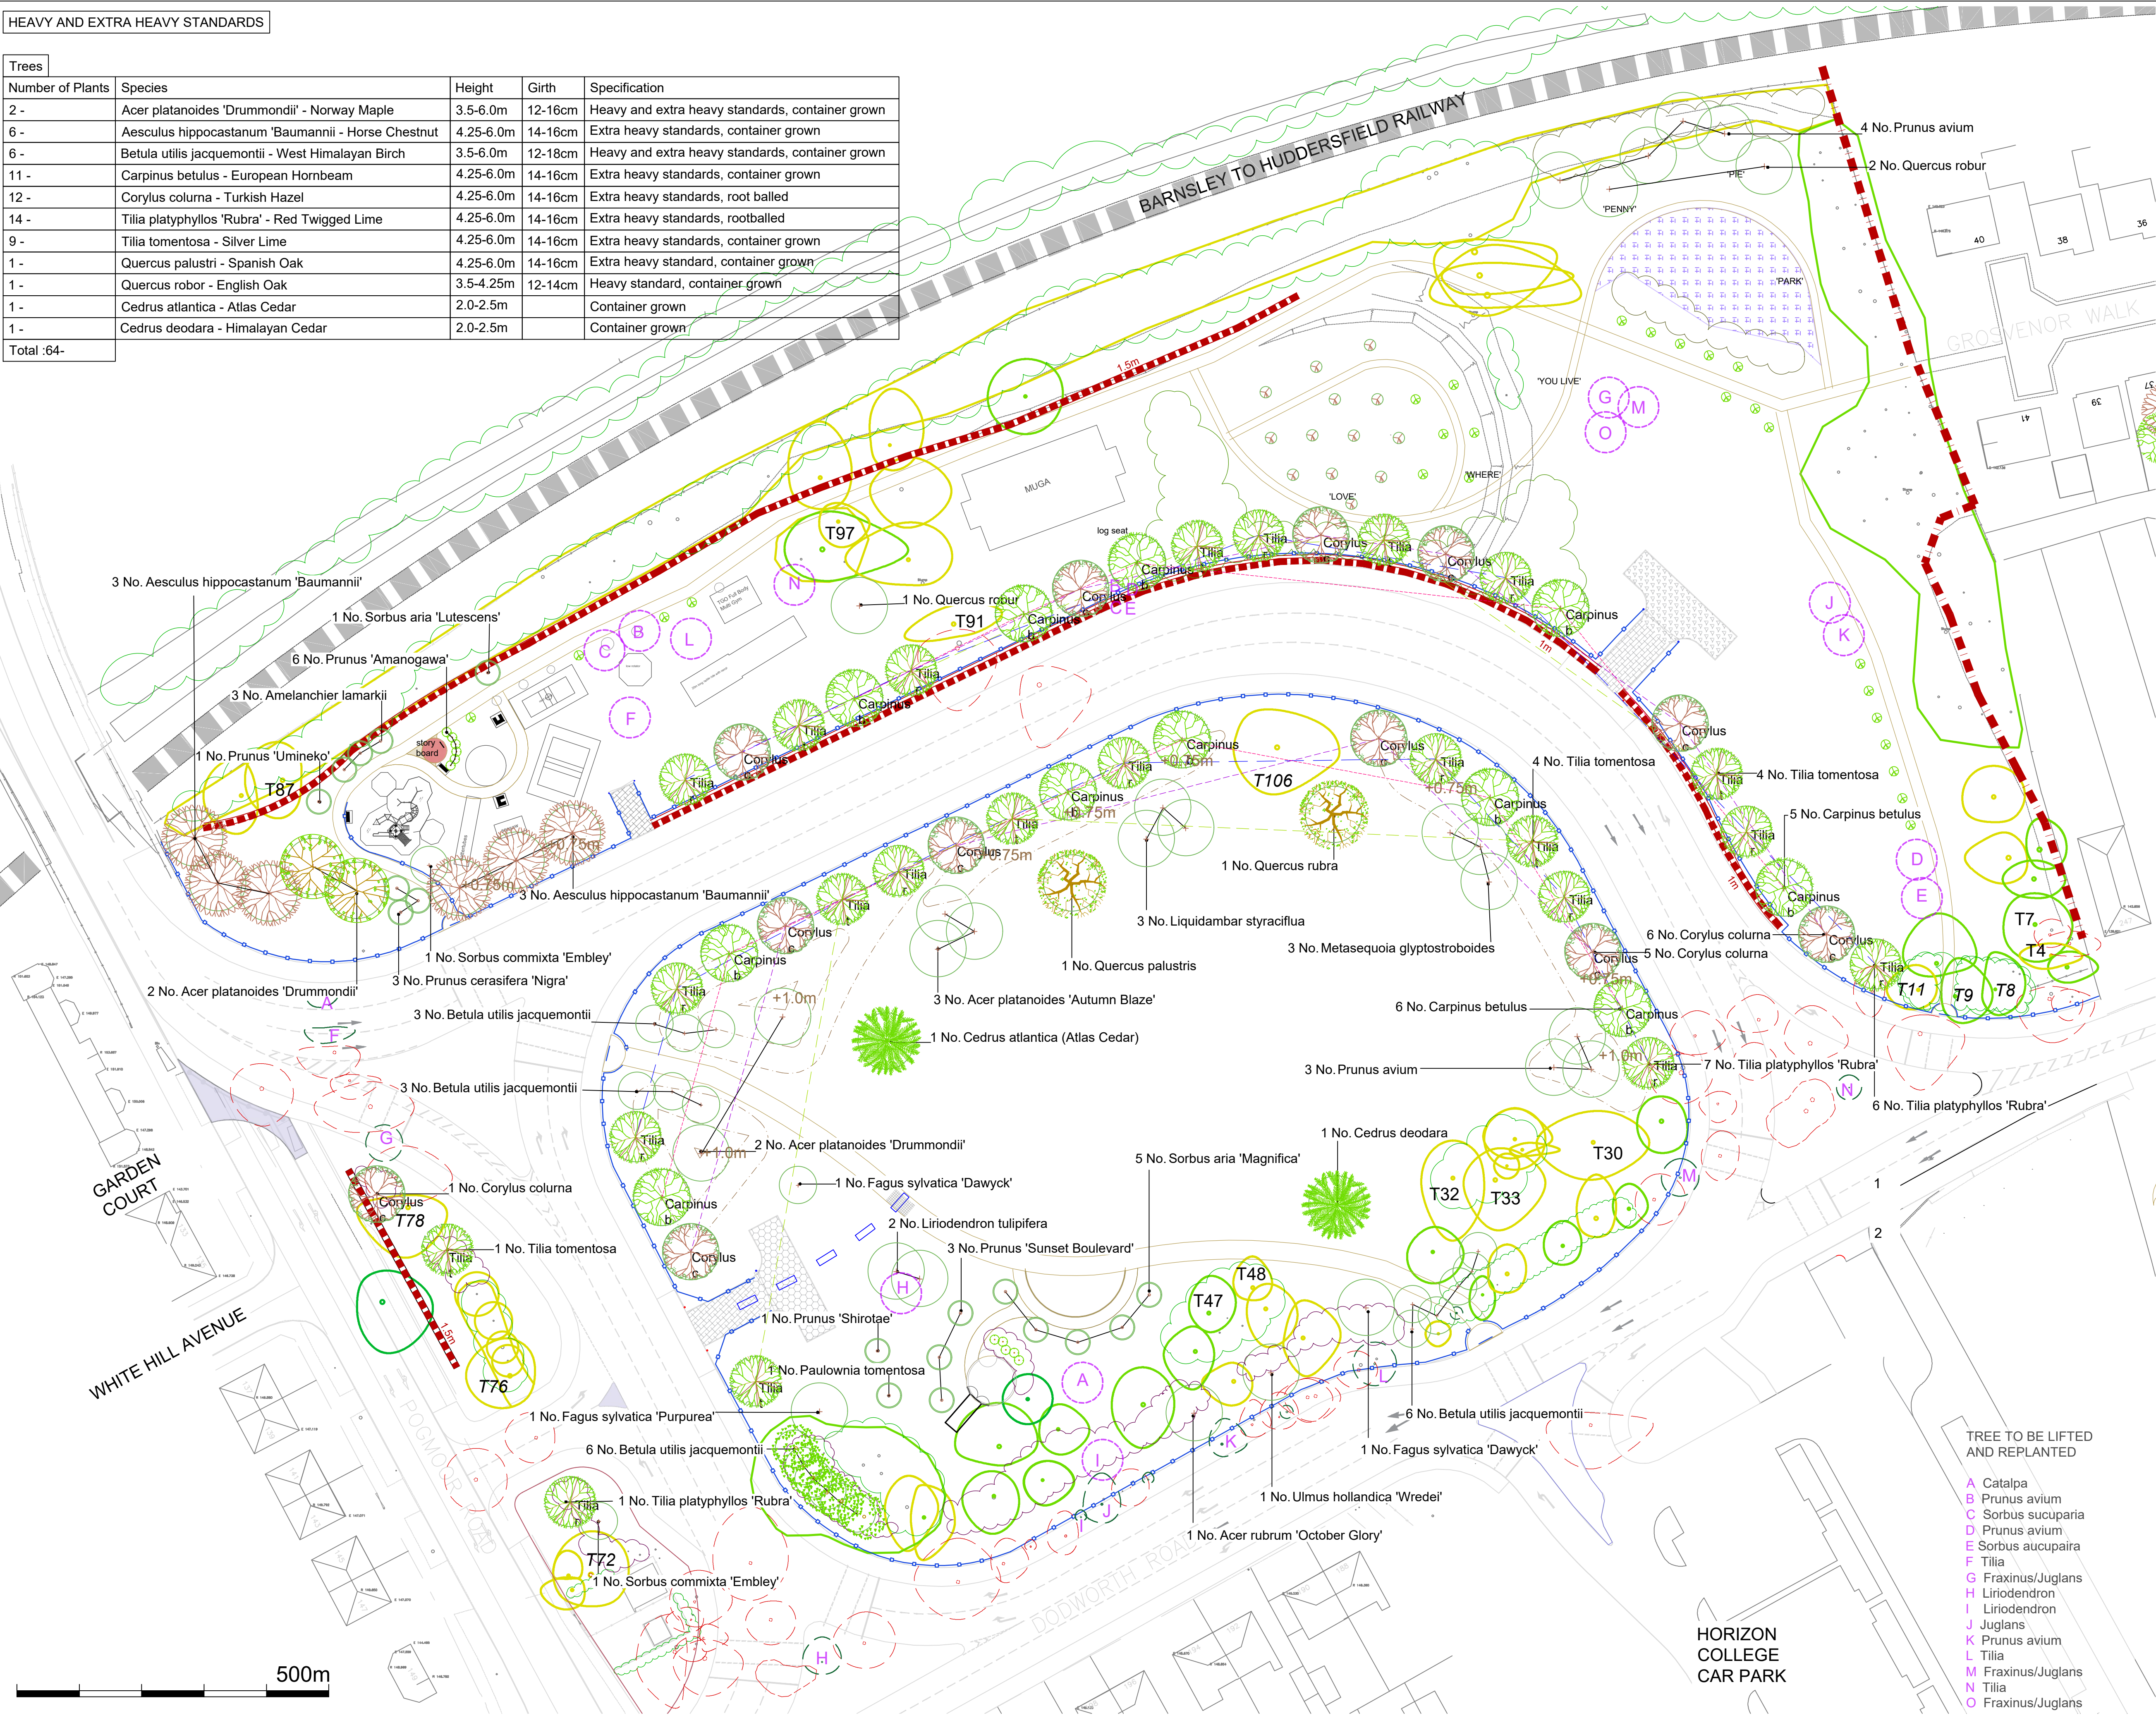

TREES

- existing mature trees - to remain
- existing tree planted by Friends of Penny Pie Park
- existing tree to be removed
- existing tree to be lifted for replanting (15 in total)
- location of existing tree which is replanted (15 in total)
- semi-mature tree: specimen conifer 6-7 m tall
- semi-mature tree: specimen oak from 7m tall
- semi-mature avenue and roadside trees 4-5m tall
- semi-mature tree: specimen birch 4-5m tall
- additional orchard tree to be planted
- feature tree to be planted - 16-18cm girth extra heavy std for roadside, 14-16cm ehs or hs elsewhere

OTHER VEGETATION

- existing shrubs or scrub to remain
- proposed shrubs
- proposed woodland buffer planting

BARRIERS

- metal railings, 1.5m high, black, with concrete block/slab mowing margin
- metal arch for pedestrian entrance to park
- Acoustic fence, timber, 3m high
- Acoustic wall, gabions, either 1m high or 1.5m high

PATHS AND PAVING

- 1.8m ad 1.2m wide Flexipave paths in linear park
- 3m wide Flexistone path in central area
- 1.2m wide Flexistone path

FURNITURE AND EQUIPMENT

- route for fairground vehicles with reinforced cross over path
- picnic bench, Lightmain flat bar, green, with access for wheelchair or pushchair
- seat, Lightmain round bar, green
- Friends of Penny Pie Park container cafe

Bird and bat boxes to be installed with assistance of Friends of Penny Pie Park

* Tree Survey and Arboricultural Assessment updated 28 June 2018 by Wainwright Landscape Architecture.

Rev D: 04-11-19. Tree Photos - removed 22-01-22
Rev C: 07-10-19. Amendments to tree size
Rev B: 11-09-19. Addition of trees for 'lift and shift'
Rev A: 22-08-19. Addition of Pawlonia and Catalpa

Landscape			
Client	BARNSELY MBC	Project	PENNY PIE PARK
Drawn by	KE	Checked by	KE
TREE PLANTING - Positions and Species of relocated trees			
Scale	1:1000 @ A3	Date	Aug 2019
Scale	1:500 @ A1	Date	Jan 2022
Rev	KE	Rev	PPP/557/06
Rev	D	Rev	D